

EBLS series 系列

INTRODUCTION 產品介紹

Multilayer chip inductors use magnetic material and multilayer technology in producing revolutionary inductors which do not use any wire windings. Ferrite paste and electric conductor paste are alternately layered and sintered into a completely monolithic structure to form an inductor with a perfectly closed magnetic circuit and an excellent magnetic shield.

積層式晶片電感在製造上使用磁性材質和積層的技術，沒有任何線圈纏繞，而是以氧化鐵調料及內電極銀漿一層一層印刷再燒結生成的積層式晶片電感，有完美的密閉式磁場迴路及優良的磁性保護，形成完整的單石結構。

FEATURES 特色


1. Monolithic structure for high reliability.
單石結構確保高信賴性
2. No cross coupling between inductors due to magnetic shield and is suitable for high density printed circuit boards.
經由磁性保護，電感間無交互耦合現象，適合高密度之印刷電路板。
3. Dimensions are unified for automatic mounting.
尺寸統一適合自動化表面黏著。
4. Excellent solderability and high heat resistance for either flow or reflow soldering.
優良的焊錫性及耐熱性，適合 flow 及 reflow 兩種鉚錫方式。

APPLICATION 適用產品

1. Tablet, notebook, and desktop computers and peripheral equipments. 平板、筆記型、桌上型電腦及其週邊設備。
2. Mobile phone, Smart phone. 行動電話、智慧手機。
3. Other various electronic appliances. 其他各式電子產品。

PART NUMBER SYSTEM 編碼系統

EBL S 1608 47N K

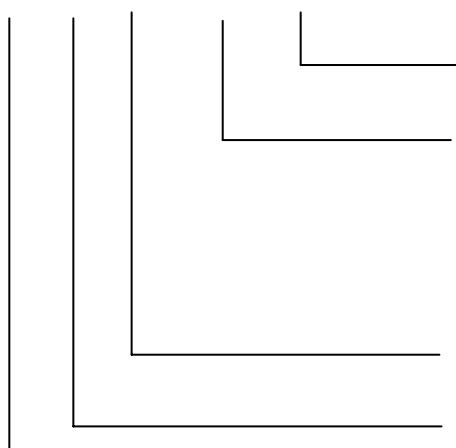

Inductance tolerance 電感值公差
G--±2% J--±5% K--±10% M--±20%


Inductance value code. 電感值
Expressed in nH or μH 以 nH 或 μH 表示
1μH=1000nH

Example: 例如
47N---- 47 nH
R15---- 0.15 μH
1R0---- 1.0 μH

Size code 尺寸碼
Dimensions L×W 尺寸 長×寬 1608 1.6×0.8(mm)

Lead Free -無鉛
Product series code 產品系列碼

SHAPES AND DIMENSIONS 形狀和尺寸

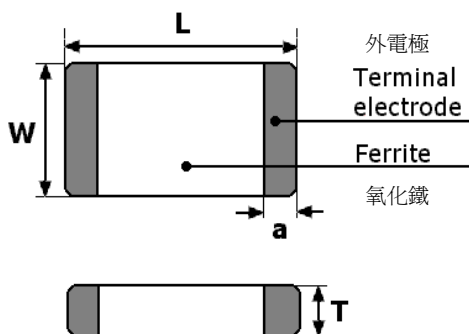

SHAPE 尺寸	L 長 mm	W 寬 mm	T 厚 mm	a 銀寬 mm
1608(0603)	1.6±0.15	0.8±0.15	0.8±0.15	0.2~0.6
2012(0805)	2.0±0.2	1.25±0.2	*	0.2~0.8
3216(1206)	3.2±0.2	1.6±0.2	*	0.4~1.0
3225(1210)	3.2±0.2	2.5±0.2	*	0.6~1.0
4532(1812)	4.5±0.2	3.2±0.2	*	0.6~1.0

*Please refer to the detailed figures shown in the EBLs2012 / 3216 / 3225 / 4532 series tables

厚度請參考 EBLs2012 / 3216 / 3225 / 4532 系列特性表

* Max Echo reserves the rights for revising the content of this catalog without further notification.
鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。